



औरही नगरपालिका

नगर कार्यपालिकाको कार्यालय

प.सं.: २०८२/८३
च.नं.:


औरही, महोत्तरी
मधेश प्रदेश, नेपाल

www.aurahimunmahottari.gov.np
aurahimunmahottari@gmail.com

दररेट पेश गर्ने सम्बन्धि सूचना

प्रथम पटक प्रकाशित मिति २०८३/०९/२९

यस औरही नगरपालिकाको आ.व.२०८२/८३ को लागि जिल्ला दररेटमा उल्लेख नभएको खुल्ला जिम सामाग्रीको आवश्यकता अनुसार खरिद गर्ने प्रयोजनका लागि उक्त सामानहरूको प्रति ईकाइ दररेट आवश्यक भएको हुदा नेपाल सरकार बाट इजाजत प्राप्त इच्छुक सप्लायर्सहरूले भ्याटमा दर्ता भएको प्रमाणपत्र, आर्थिक बर्ष २०८१/८२ को कर चुक्ता प्रमाणपत्र, उद्योग व्यावसाय दर्ता भएको प्रमाण तथा पालिकाबाट पाएको इजाजत पत्र राखी यो सूचना प्रकाशन भएको मितिले ७(सात) दिन भित्र यस कार्यालयमा तपशिलमा उल्लेख सामानहरूको दररेट सहित पेश गर्नुहुनको लागि यो सूचना प्रकाशित गरिएको छ । (साथै सम्पूर्ण उल्लेखित सामाग्रीहरू ढुवानी, आवश्यक लेवल गरि तोकिएको स्थानमा फिटिंग समेत गर्नेगरिको एकमुष्ट प्रति ईकाइ दररेट पेश गर्न जानकारी गराईन्छ ।)

S.N.	Items	Specification	Unit	Rate	Amount	Amount in Word	Remarks
1		1. Material: Galvanized Mild Steel Pipes. 2. Dimension: 1320mmx990mmx1140mm. 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. 5. Bearing holder 60mm pipe with thickness 4.5mm. 6. Step shaft EN8.8 soft of diameter 32mm used with step of 25mm. 7. Mild steel seat, and foot cover with 2mm thickness. 8. Permanent lubricated sealed bearing of japanese brand: Nachi for maintenance free usage. 9. All open ends of pipe either scaled or closed by MS/LLDPE cap for user safety. 10. Rubber handle cover with best grip. 11. Paint: Electrostatic oven cooked Power Coated Paint. 12. Thickness of Base plate for fixing 8mm. with 4 ribs. 13. Foundation reinforcement: For M16x480mm J bolt interconnected with each other with 6mm rod	Set				
	Single rower						


ने प्रमुख प्रशासकीय अधिकृत



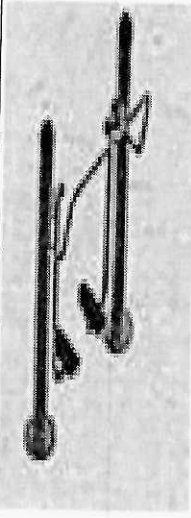

औरही नगरपालिका


नगर कार्यपालिकाको कार्यालय

प.सं.: २०८२/८३
च.नं.:

औरही, महोत्तरी
मधेश प्रदेश, नेपाल

www.aurahimunmahottari.gov.np
aurahimunmahottari@gmail.com

2	 Air Walker	<ol style="list-style-type: none">1. Material: Galvanized Mild Steel Pipes.2. Dimension: 1320mmx440mmx1200mm.3. Main frame pipe 114mm with thickness 3.5mm.4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm.5. Step EN8.8 shaft of 32mm used with step of 25mm.6. Mild steel foot cover with thickness 2mm on frame.7. Permanent lubricated sealed bearing of Japanese brand: Nachi for maintenance free usage.8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.9. Paint: Electrostatic oven cooked Powder coated Paint.10. Thickness of Base plate for fixing 8mm with 4 ribs.11. Foundation reinforcement: Four M16 x 480mm J bolt interconnected with each other with 6mm rod.	Set				
3	 Double Elliptical trainer	<ol style="list-style-type: none">1. Material: Galvanized Mild Steel Pipes.2. Dimension: 1265mmx550mmx1780mm.3. Main frame pipe 114mm with thickness 3.5mm.4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm.5. Step EN8.8 shaft of 32mm used with step of 25mm.6. Mild steel foot cover with thickness 2mm on frame.7. Permanent lubricated sealed bearing of Japanese brand: Nachi for maintenance free usage.8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.9. Rubber handle cover with best grip.10. Paint: Electrostatic oven cooked Powder Coated Paint.	Set				


नगर कार्यपालिका अधिकारी



औरही नगरपालिका

नगर कार्यपालिकाको कार्यालय

प.सं.: २०८२/८३

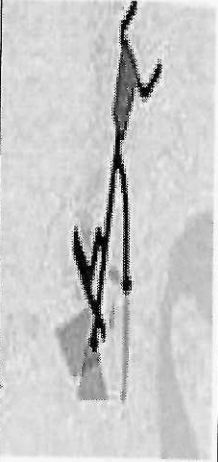
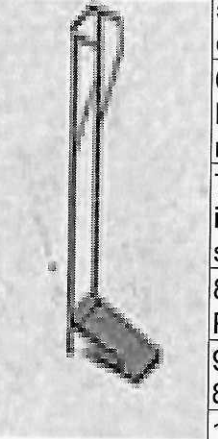
च.नं.:


औरही, महोत्तरी
मधेश प्रदेश, नेपाल



www.aurahimunmahottari.gov.np

aurahimunmahottari@gmail.com

		11. Thickness of Base plate for fixing 8mm with 4 ribs.					
		12. Foundation reinforcement: Four M16 x 480mm J. bolt interconnected with each other with 6mm rod.					
4		1. Material: Galvanized Mild Steel Pipes.	Set				
		2. Dimension: 1000mmx550mmx500mm.					
		3. Main frame rectangle pipe 80mmx40mm with thickness 3.5mm.					
		4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm.					
		5. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.					
		7. Rubber handle cover with best grip.					
		8. Paint: Electrostatic oven cooked Powder Coated Paint.					
		9. Thickness of Base plate for fixing 8mm with 4 ribs.					
		10. Foundation reinforcement: Four m16 x 480mm J bolt interconnected with each other with 6mm rod.					
5		1. Material: Galvanized Mild Steel Pipes.		Set			
		2. Dimension: 1200mmx750mmx1400mm.					
		3. Main frame pipe 114mm with thickness 3.5mm.					
		4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm.					
		5. EN8.8 shaft of 16mm used with step of 15mm.					
		6. Permanent lubricated sealed bearing of Japanese brand: Nachi for maintenance free usage.					
		7. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.					
		8. Paint: Electrostatic oven cooked Powder Coated Paint.					
		9. Thickness of Base plate for fixing 8mm with 4 ribs.					
		10. 73 Foundation reinforcement: Four M16 x 480mm J bolt interconnected with each other with 6mm rod.					


नेपाल प्रजासत्ताक अधिकृत



प.सं.: २०८२/८३
च.नं.:

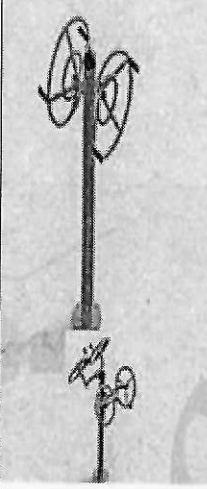
औरही नगरपालिका
नगर कार्यपालिकाको कार्यालय
औरही, महोत्तरी
मधेश प्रदेश, नेपाल
२०७४

औरही नगरपालिका


नगर कार्यपालिकाको कार्यालय

औरही, महोत्तरी
मधेश प्रदेश, नेपाल

www.aurahimunmahottari.gov.np
aurahimunmahottari@gmail.com

6		1. Material: Galvanized Mild Steel Pipes.	Set				
		2. Dimension: 1370mmx890mmx1480mm.					
		3. Main frame pipe 114mm with thickness 3.5mm.					
		4. Handle frame 32mm and other frame 48mm pipe with thickness 305mm. Bearing holder 60mm pipe with thickness 4.5mm.					
		5. Step EN8.8 shaft of 32mm used with step of 25mm.					
		6. Permanent lubricated sealed bearing of Japanese brand: nachi for maintenance free usage.					
		7. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.					
		8. Rubber handle cover with best grip.					
		9. Paint: Electrostatic oven cooked Powder coated Paint.					
		10. Thickness of Base plate for fixing 8mm.					
		11. Foundation reinforcement: Four M16 x 480mm J bolt interconnected with each other with 6m rod.					

Thai Chi Spinner/Arm and shoulder wheel

S.N.	Items	Specification	Unit	Rate	Amount	Amount in Word	Remarks
7		1. Material: Galvanized Mild Steel Pipes. 2. Dimension: 1700mmx550mmx1548mm. 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 305mm. Bearing holder 60mm pipe with thickness 4.5mm. 5. Step EN8.8 shaft of 32mm used with step of 25mm. 6. Mild steel seat, foot cover and foot paddle with thickness 2mm on frame. 7. Permanent lubricated sealed bearing of Japanese brand: Nachi for maintenance free usage.	Set				

Leg extension (Stepper) and fitness rider cycle

(Signature)
7/29
ने. प्रमल प्रसादकीर्त अघिकृत



औरही नगरपालिका

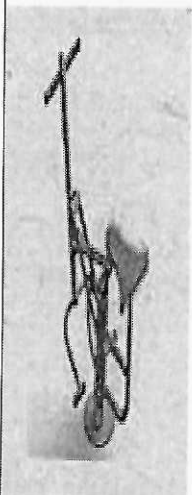
नगर कार्यपालिकाको कार्यालय

प.सं.: २०८२/८३

च.नं.:

औरही, महेत्तरी
मधेश प्रदेश, नेपाल

www.aurahimunmahottari.gov.np
aurahimunmahottari@gmail.com

		<p>8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.</p> <p>9. Paint: Electrostatic oven cooked Powder coated Paint.</p> <p>10. Thickness of Base plate for fixing 8mm with 4 ribs.</p> <p>11. Foundation reinforcement: Four M16 x 480mm J bolt interconnected with each other with 6m rod.</p>				
8		<p>1. Material: Galvanized Mild Steel Pipes.</p> <p>2. Dimension: 1000mm x700mmx1000mm.</p> <p>3. Main frame pipe 114mm with thickness 3.5mm.</p> <p>4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Mild steel flat of 50mmx10mm used. Bearing holder 60mm pipe with thickness 4.5mm.</p> <p>5. Step EN8.8 saft of 32mm used with step of 25mm.</p> <p>6. Mild steel foot cover with thickness 2mm on frame.</p> <p>7. Permanent lubricated sealed bearing of Japanese brand: Nachi for maintenance free usage.</p> <p>8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.</p> <p>9. Nyle stopper 1 inch daimeter.</p> <p>10. Rubber handle cover with best grip.</p> <p>11. Paint: Electrostatic oven cooked Power Coated Paint.</p> <p>12. Thickness of Base plate for fixing 8mm.with 4 ribs.</p> <p>13. Foundation reinforcement: For M16x480mm J bolt interconnected with each other with 6mm rod.</p>	Set			
9		<p>1. Material: Galvanized Mild Steel Pipes.</p>	Set			

9/29
ने. प्रमुख प्रशासकीय अधिकृत



औरही नगरपालिका

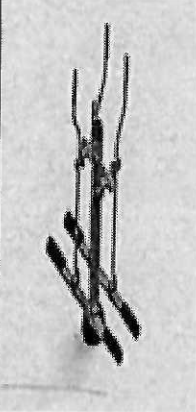
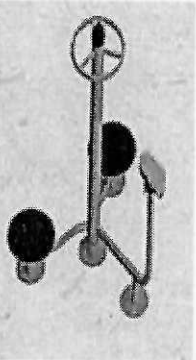
नगर कार्यपालिकाको कार्यालय

प.सं.: २०८२/८३

च.नं.:

औरही, महोत्तरी
मधेश प्रदेश, नेपाल

www.aurahimunmahottari.gov.np
aurahimunmahottari@gmail.com

	<p>2. Dimension: 1380mmx570mmx1620mm.</p> <p>3. Main fame rectangle pipe 80mmx40mm with thickness 3.5mm.</p> <p>4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm.</p> <p>5. Step EN8.8 saft of 32mm used with step of 25mm.</p> <p>6. Mild steel foot cover with thickness 2mm on frame.</p> <p>7. Permanent lubricated sealed bearing of Japanese brand: Nachi for maintenance free usage.</p> <p>8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.</p> <p>9. Rubber handle cover with best grip.</p> <p>10. Paint: Electrostatic oven cooked Powder Coated Paint.</p> <p>11. Thickness of Base plate for fixing 8mm with 4 ribs.</p> <p>12. Foundation reinforcement: Four M16 x 480mm J. bolt interconnected with each other with 6mm rod.</p>				
<p>Double cross walker, Skeir</p>	<p>1. Material: Galvanized Mild Steel Pipes.</p> <p>2. Dimension: 1680mmx1680mmx1348mm.</p> <p>3. Main frame pipe 114mm with thickness 3.5mm.</p> <p>4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm.</p> <p>5. Twister plate of mild steel thickness 10mm.</p> <p>6. Step shaft EN8.8 saft of 32mm used with step of 25mm.</p>	<p>Set</p>			<p>9/29</p> <p>प्रमुख प्रशासकीय अधिकारी</p>
					
<p>Triple twister sitting an standing</p>					



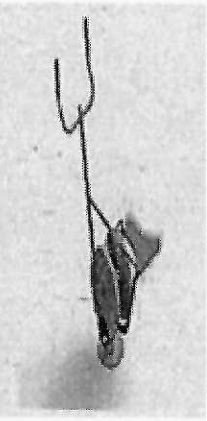
औरही नगरपालिका

नगर कार्यपालिकाको कार्यालय


प.सं.: २०८२/८३
च.नं.:

औरही, महोत्तरी
मधेश प्रदेश, नेपाल
२०७४

www.aurahimnurahottari.gov.np
aurahimnurahottari@gmail.com

		<p>7. Mild steel seat with thickness 2mm on frame.</p> <p>8. Permanent lubricated seaaled bearing of japanese brand: Nachi for maintenace free usage.</p> <p>9. All open ends of pipe either scaled pr closed by MS/LLDPE cap for user safety.</p> <p>10. Paint: Electrostatic oven coocked Powder Coated Paint.</p> <p>11. Thickness of Base plate for fixing 8mm with 4 ribs.</p> <p>12. Foundation reinforcement: Four M16 x 480mm J. bolt interconnected with each other with 6mm rod.</p>			
11		<p>1. Material: Galvanized Mild Steel Pipes.</p> <p>2. Dimension: 1050mmx548mmx1470mm.</p> <p>3. Safe play Area: 1.5 Meter x 1 Meter.</p> <p>4. Main frame pipe 114mm with thickness 3.5mm.</p> <p>5. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe wwith thickness 4.5mm.</p> <p>6. Step shaft EN8.8 saft of 32mm used with step of 25mm.</p> <p>7. Mild steel seat with thickness 2mm on frame.</p> <p>8. Permanent lubricated seaaled bearing of japanese brand: Nachi for maintenace free usage.</p> <p>9. All open ends of pipe either scaled or closed by MS/LLDPE cap for user safety.</p> <p>10. Rubber handle cover with best grip.</p> <p>11. Paint: Electrostatic oven coocked Power Coated Paint.</p>	Set		

Outdoor cycle


११/२९
ते प्रमुख प्रशासकीय अधिकृत



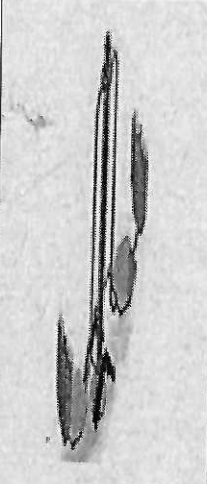
औरही नगरपालिका

नगर कार्यपालिकाको कार्यालय

प.सं.: २०८२/८३
च.नं.:

औरही, महोत्तरी
मधेश प्रदेश, नेपाल
२०७४

www.aurahimunmahottari.gov.np
aurahimunmahottari@gmail.com

		12. Thickness of Base plate for fixing 8mm. with 4 ribs. 13. Foundation reinforcement: For M16x480mm J bolt interconnected with each other with 6mm rod.					
12		1. Material: Galvanized Mild Steel Pipes. 2. Dimension: 1700mmx380mmx1550mm. 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm. 5. Step EN8.8 soft of 32mm used with step of 25mm. 6. Mild steel seat, foot cover and foot paddle with thickness 2mm on frame. 7. Permanent lubricated sealed bearing of Japanese brand: Nachi for maintenance free usage. 8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 9. Thickness of Base plate for fixing 8mm with 4 rib. 10. Foundation reinforcement: Four M16 x 480mm J bolt interconnected with each other with 6mm rod.	Set				
	Double Leg press						

S.N.	Items	Specification	Unit	Rate	Amount	Amount in Word	Remarks
		1. Material: Galvanized Mild Steel Pipes. 2. Dimension: 1.2mmx1mmx2100mm. 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame pipe 114mm with thickness 3.5mm.					

9/29
नि प्रमुख प्रशासकीय अधिकारी



औरही नगरपालिका

नगर कार्यपालिकाको कार्यालय

प.सं.: २०८२/८३

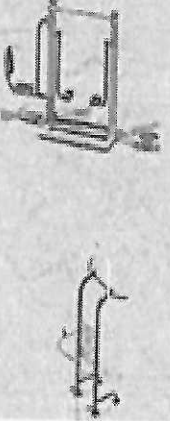
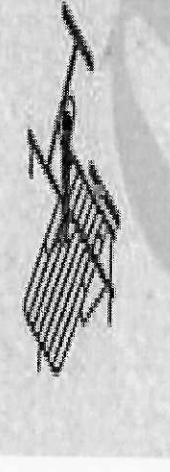
च.नं.:

औरही, महोत्तरी
मधेश प्रदेश, नेपाल



www.aurahimunmahottari.gov.np

aurahimunmahottari@gmail.com

13		<p>5. All open ends of pipe either sealed in or closed by MS/LLDPE</p> <p>cap for user safety.</p> <p>6. Rubber handle cover with best grip.</p> <p>7. Paint: Electrostatic oven cooked Powder Coated Paint.</p> <p>8. Thickness od Base plate for fixing 8mm with 4 ribs.</p> <p>9. Foundation reinforcement: Four M16 x 480mm J. bolt interconnected with each other with 6mm rod.</p>	Set				
14		<p>1. Material: Galvanized Mild Steel Pipes.</p> <p>2. Dimension: 1.2mmx1mmx2100mm.</p> <p>3. Main frame pipe 114mm with thickness 3.5mm.</p> <p>4. Handle frame pipe 114mm with thickness 3.5mm.</p> <p>5. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.</p> <p>6. Paint: Electrostatic oven cooked Powder Coated Paint.</p> <p>7. Thickness od Base plate for fixing 8mm with 4 ribs.</p> <p>8. Foundation reinforcement: Four M16 x 480mm J. bolt interconnected with each other with 6mm rod.</p>	Set				

११/२९/१९
ने. प्रमुख प्रशासकीय अधिकृत